



CM30

Please note that the images are for illustrative purposes only. The final product may vary in design, features or specifications.

CM30 is designed for workshop use. CM30 is manually operated and easy to use and it comes with a fume exhaust connection.

3-phase and 1-phase electric configurations available. Please also see product cards for other CM30/35 configurations.

ABSOLUTE
QUALITY
MADE IN
FINLAND

TECHNICAL DATA

Max. hose size (inch) ¹⁾	2 / 1 ¼
Diameter (blade) external (mm)	300x3
Diameter (blade) internal (mm)	30
Max. hose OD (mm)	70
Exhaust outlet OD (mm)	60
Motor Power (kW) ²⁾	3.0/2.2
Motor Power (HP) ²⁾	4.0/2.9
Velocity, 50Hz (rpm)	2750
Velocity, 60Hz (rpm)	3370

DIMENSIONS (LxWxH)

mm	600x503x739
inch	23.6x19.8x29.1

WEIGHT

kg/lbs	42/92.4
--------	---------

Power supply cable not included.

MOTOR BRAKE

CM30B is equipped with mechanical brake for faster stopping of blade rotation.

PNEUMATIC PUSHER

CM30P is equipped with pneumatically operated hose pusher.

MODELS


Standard
CM30B
CM30P

STANDARD FEATURES

Toothed blade (part no 12297)

OPTIONS

Smooth blade (part no 12319)

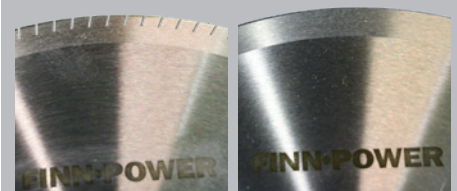

Toothed blade as a standard feature.

Smooth blade as an option.

- 1) Hydraulic hose, 1-2 wire / 4 wire
- 2) 3-phase / 1-phase