


Throttle valve

Technical specifications are measured with mineral oil ISO VG32 at 50°C (122°F) temperature.

	22.25.04	22.25.06
Max. flow	30 l/min (7.9 US gpm)	
Max. pressure	350 bar (5100 psi)	
Fluid	mineral based oil	
Viscosity	from 10 to 200 cSt	
Max. level of contamination	18/16/13 ISO4406	
Fluid temperature	with NBR seals from -20°C (-4°F) to 80°C (176°F)	
Environmental temp. for working conditions	from -40°C (-40°F) to 100°C (212°F)	
Material	steel	
Weight	0.048 kg (0.106 lb)	0.076 kg (0.172 lb)

NOTE - For different conditions and thread, please contact Walvoil Sales Dpt.

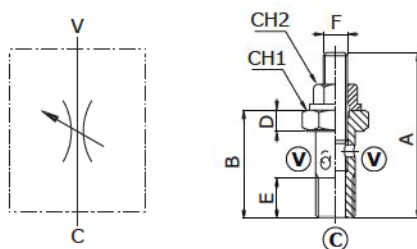

Dimensions are in mm-in

Valve type	(V)	(C)	A	B	D	E	F	CH1	CH2	Ordering code
22.25.04	Ø3 Ø0.118	G1/4	60 2.36	36 1.42	7 0.276	13.5 0.531	M8	19	13	22.25.04
22.25.06	Ø4 Ø0.157	G3/8	63 2.48	39 1.54	8 0.315	16 0.630	M8	22	13	22.25.06